



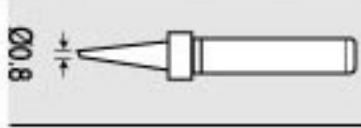
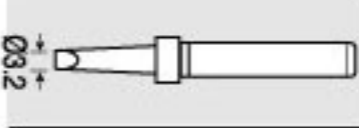

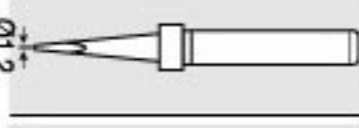
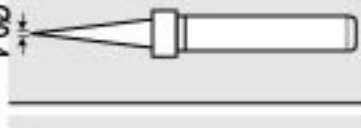
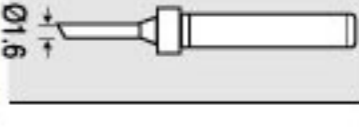

SOLDERING & DESOLDERING

608-351/608-352 Series Soldering Station

- Adjustable temperature and a variety of available tips.
- Grouded tip for soldering static sensitive devices.
- Overheat protection with closed loop temperature control.
- Improved circuit design for greater temperature stability.
- Heat resistant soldering iron cord.
- Built-in tray with cleaning sponge.

Model No.	Voltage(v)	Consumption	Temperature	Weight (g)	Individual Packing	Station Size	Replacement Heater	Standard Plug
608-351A	110~120	48 (W)	150~420°C	2160	Color Box	170(L) 116(W) 96(H)	508-351A-H	E
608-351B	220~240							F
608-352A	110~120		E					
608-352B	220~240		F					

• Replacement TIP:

	508-351-T		508-351-T5
	508-351-T2		508-351-T6
	508-351-T3 (Standard)		508-351-T7
	508-351-T4		



LED display



608-351

508-351A-IRON



Digital display



608-352

508-351A-IRON